



RK140

単列

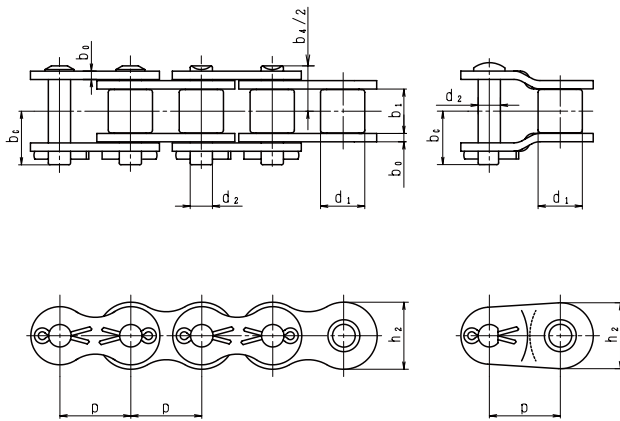

多列

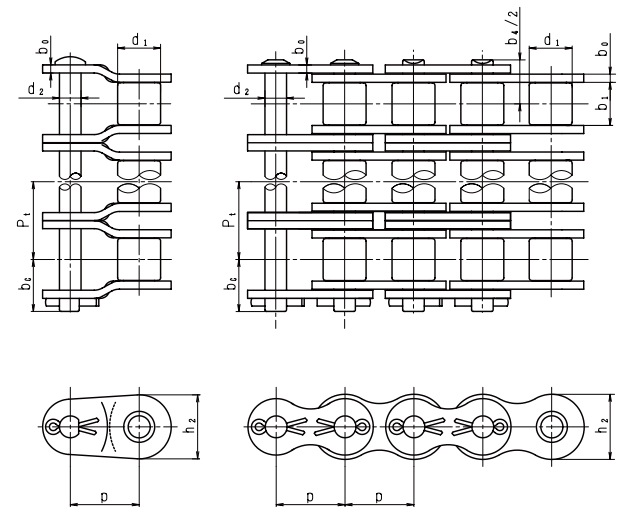

寸法票

単位 (mm)

チェーン 番 号		ピッチ	内リンク 内 幅	ローラ 外 径	ピン			横 ピッチ	プレート		引張強さ				RK最大許容張力		概略 質量
					外径	長さ			厚さ	高さ	JIS 最小		RK 平均				
RK	JIS	(P)	(b ₁)	(d ₁)	(d ₂)	(b ₄ /2)	(b _c)	(P _t)	(b _a)	(h ₂)	KN	Kgf	KN	Kgf	KN	Kgf	Kg/m
RK 140	140		min	max	max					max	185.9	18,950	215	22,000	40	4,100	7.1
RK 140-2	140-2	44.45	25.22	25.40	12.71	26.6	31.4	48.9	5.60	42.3	371.8	37,900	431	44,000	68	6,970	14.1
RK 140-3	140-3										557.7	56,850	647	66,300	100	10,250	21.1
RK 140-4	140-4										743.6	75,800	863	88,000	132	13,530	28.1

伝動能力表〔潤滑形式〕Ⅰ 手差し又は滴下給油 Ⅱ 油浴潤滑又は回転板による潤滑 Ⅲ 強制ポンプ潤滑

単位 (kw)




潤滑形式 小スプロケット	小スプロケット回転数 (rpm)																	
	10	25	50	100	150	200	250	300	350	400	450	500	550	600	700	800	900	1000
	Ⅰ									Ⅱ								
11	1.89	4.31	8.05	15.0	21.6	28.0	34.3	40.4	46.4	52.3	58.2	63.9	56.1	49.2	39.1	32.0	26.8	22.9
12	2.08	4.74	8.84	16.5	23.8	30.8	37.6	44.4	51.0	57.5	63.9	70.2	64.4	56.1	44.5	36.5	30.6	26.1
13	2.27	5.17	9.64	18.0	25.9	33.6	41.0	48.4	55.6	62.7	69.7	76.6	72.6	63.3	50.2	41.2	34.5	29.4
14	2.45	5.60	10.4	19.5	28.1	36.4	44.5	52.4	60.2	67.9	75.5	83.0	81.1	70.7	56.1	46.0	38.5	32.9
15	2.64	6.03	11.3	21.0	30.2	39.2	47.9	56.4	64.8	73.1	81.3	89.4	89.5	78.3	62.2	51.0	42.7	36.5
16	2.83	6.47	12.1	22.5	32.4	42.0	51.4	60.5	69.5	78.4	87.2	95.8	98.5	86.5	68.6	56.1	47.1	40.1
17	3.03	6.90	12.9	24.0	34.6	44.9	54.8	64.6	74.2	83.7	93.1	102	108	94.8	75.4	61.5	51.6	44.0
18	3.22	7.34	13.7	25.6	36.8	47.7	58.3	68.7	79.0	89.0	99.0	109	118	103	82.1	67.0	56.1	47.9
19	3.41	7.78	14.5	27.1	39.0	50.6	61.8	72.9	83.7	94.4	105	115	126	112	88.8	72.7	60.9	52.0
21	3.80	8.67	16.2	30.2	43.5	56.4	68.9	81.2	93.3	105	117	129	140	131	103	84.3	70.7	60.4
23	4.19	9.57	17.9	33.3	48.0	62.2	76.0	89.6	103	116	129	142	155	150	118	97.0	81.3	69.2
25	4.59	10.5	19.5	36.5	52.5	68.0	83.2	98.0	113	127	141	155	169	170	134	110	91.8	78.3
30	5.59	12.7	23.8	44.4	63.9	82.8	101	119	137	155	172	189	206	222	176	144	121	103
35	6.60	15.1	28.1	52.4	75.5	97.9	120	141	162	183	203	223	243	263	222	181	152	130
40	7.63	17.4	32.5	60.6	87.2	113	138	163	187	211	235	258	281	304	271	222	186	159
潤滑形式	Ⅰ				Ⅱ				Ⅲ									

●上の値は単列チェーンものですから多列チェーンの場合には、多列係数をかけて下さい。(選定を参照して下さい。)

140スプロケット

(単位 : mm)

歯数	外径 da	ピッチ径 d	新 B 型					A 型	
			軸孔径B		ボス		概略質量 kg	下孔 B	概略質量 kg
			下孔	最大	径dg	長さB.L			
10	163	143.84	25	60	91	56	4.40	25	2.90
11	178	157.78	25	73	106	56	5.50	25	3.40
12	193	171.74	25	80	117	56	6.60	25	4.00
13	207	185.74	25	80	117	63	7.90	25	4.70
14	221	199.76	25	89	127	63	9.30	25	5.50
15	236	213.79	25	89	127	63	10.10	25	6.30
16	250	227.84	25	89	127	63	11.00	25	7.20
17	264	241.91	25	89	127	63	12.00	25	8.10
18	279	255.98	25	89	127	63	13.00	25	9.10
19	293	270.06	25	95	137	71	15.60	25	10.30
20	307	284.15	25	95	137	71	16.70	25	11.40
21	322	298.24	25	95	137	71	17.90	25	12.60
22	336	312.34	30	95	137	71	18.40	30	13.80
23	350	326.44	30	95	137	71	20.50	30	15.10
24	364	340.54	30	95	137	71	20.90	30	16.40
25	379	354.65	30	103	147	80	24.10	30	17.80
26	393	368.77	30	103	147	80	25.50	30	19.20
27	407	382.88	30	103	147	80	28.10	30	20.70
28	421	397.00	30	103	147	80	29.70	30	22.20
29	435	411.12	30	103	147	80		30	23.80
30	450	425.24	30	103	147	80	31.50	30	25.50
31	464	439.37	30	103	147	80		30	27.20
32	478	453.49	30	110	157	90	36.60	30	29.00
33	492	467.62	30	110	157	90		30	30.80
34	506	481.75	30	110	157	90	40.40	30	32.70
35	521	495.88	30	110	157	90	42.90	30	34.60
36	535	510.01	30	110	157	90	47.00	30	36.90
37	549	524.14	30	110	157	90		30	
38	563	538.27	30	110	157	90		30	41.00
39	577	552.90	30	110	157	90		30	
40	591	566.54	30	110	157	90	53.10	30	45.40
42	620	594.81	30	110	157	90	59.50	30	50.00
44	648	623.08	30	110	157	90		30	
45	662	637.22	30	118	167	100	67.60	30	57.30
46	676	651.35	30	118	167	100		30	
48	705	679.63	30	118	167	100	77.70	30	65.20
50	733	707.91	30	118	167	100	83.10	30	70.60
54	789	764.47	38	118	167	100	95.20	30	82.70
55	804	778.61	38	118	167	100		30	85.70
60	875	849.32	38	118	167	112	118.00	30	104.00

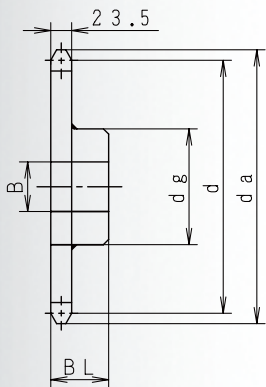

新BW型