



RK200

単列

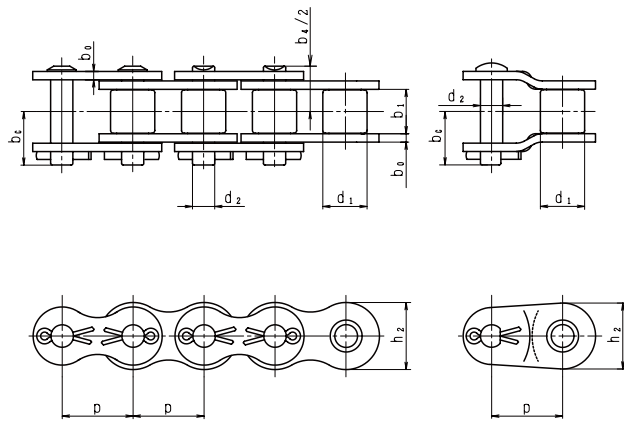

多列

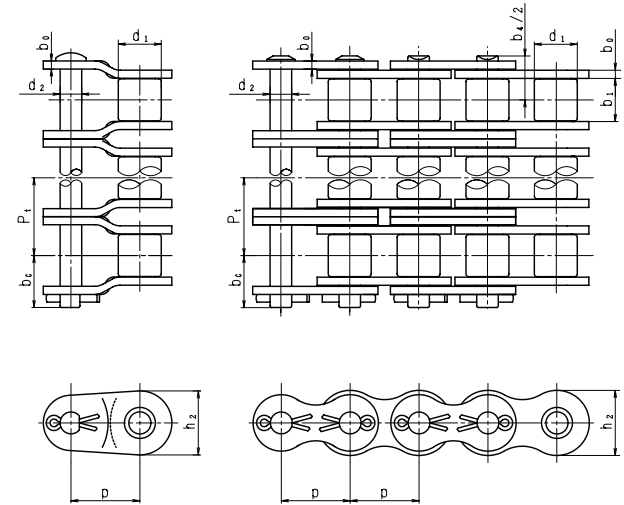

寸法票

単位 (mm)

チェーン 番 号	ピッチ (P)	内リンク 内 幅 (b1)	ローラ 外 径 (d1)	ピン			横 ピッチ (Pt)	プレート		引張強さ				RK最大許容張力		概略 質量 Kg/m
				外径 (d2)	長さ (b4/2)	(bc)		厚さ (bo)	高さ (h2)	JIS 最小 KN	Kgf	RK 平均 KN	Kgf	KN	Kgf	
RK 200	200		min	max	max				max	382	38,900	470	48,000	73	7,500	17.3
RK 200-2	200-2	63.50	37.85	39.68	19.85	39.05	46.65	71.6	8.00	763	77,810	941	96,000	125	12,750	34.6
RK 200-3	200-3									1,145	116,720	1,412	144,000	183	18,750	50.8
RK 200-4	200-4									1,527	115,630	1,883	192,000	242	24,750	67.6

運動能力表〔潤滑形式〕Ⅰ手差し又は滴下給油 Ⅱ油浴潤滑又は回転板による潤滑 Ⅲ強制ポンプ潤滑

単位 (kw)

潤滑形式 小スプロケット	小スプロケット回転数 (rpm)																
	10	15	20	30	40	50	100	150	200	250	300	350	400	450	550	600	650
	Ⅰ										Ⅱ						
11	4.39	6.33	8.20	11.8	15.3	18.7	34.9	50.3	65.1	79.6	93.8	108	121	101	74.6	65.5	58.1
12	4.83	6.95	9.01	13.0	16.8	20.5	38.3	55.2	71.5	87.4	103	118	133	115	85.1	74.6	0
13	5.26	7.58	9.82	14.1	18.3	22.4	41.8	60.2	78.0	95.3	112	129	146	130	96.2	84.3	0
14	5.70	8.21	10.6	15.3	19.8	24.3	45.3	65.2	84.5	103	122	140	158	145	107	94.0	0
15	6.14	8.85	11.5	16.5	21.4	26.1	48.8	70.3	91.0	111	131	151	170	160	119	104	0
16	6.58	9.48	12.3	17.7	22.9	28.0	52.3	75.3	97.6	119	141	162	182	177	131	115	0
17	7.03	10.1	13.1	18.9	24.5	29.9	55.8	80.4	104	127	150	172	194	194	143	126	0
18	7.48	10.8	14.0	20.1	26.0	31.8	59.4	85.6	111	135	160	183	207	212	156	137	0
19	7.93	11.4	14.8	21.3	27.6	33.7	63.0	90.7	118	144	169	194	219	229	169	148	0
20	8.38	12.1	15.6	22.5	29.2	35.7	66.6	95.9	124	152	179	206	232	248	183	0	
21	8.83	12.7	16.5	23.7	30.8	37.6	70.2	101	131	160	189	217	244	267	197	0	
22	9.29	13.4	17.3	25.0	32.3	39.5	73.8	106	138	168	198	228	257	286	211	0	
23	9.74	14.0	18.2	26.2	33.9	41.5	77.4	111	144	177	208	239	270	300	226	0	
24	10.2	14.7	19.0	27.4	35.5	43.4	81.0	117	151	185	218	250	282	314	241	0	
25	10.7	15.4	19.9	28.7	37.1	45.4	84.7	122	158	193	228	262	295	328	256	0	
潤滑形式	Ⅰ							Ⅱ				Ⅲ					

●上の値は単列チェーンのもので多列チェーンの場合には、多列係数をかけて下さい。(選定を参照して下さい。)