



RK40

単列

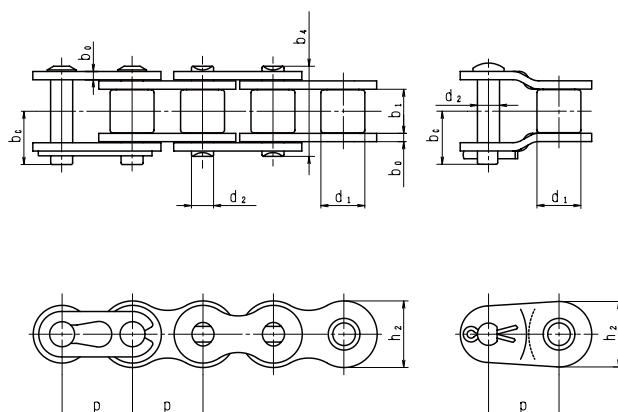

多列

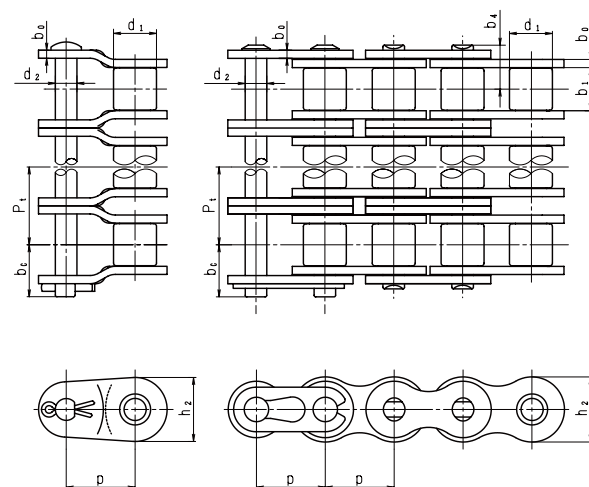

寸法票

単位 (mm)

チェーン 番 号	ピッチ (P)	内リンク 内 幅 (b ₁)	ローラ 外 径 (d ₁)	ピン			横 ピッチ (P _t)	プレート		引張強さ				RK最大許容張力		概略 質量 Kg/m
				外径 (d ₂)	長さ (b ₄ /2)	(b _c)		厚さ (b ₀)	高さ (h ₂)	JIS 最小 KN	Kgf	RK 平均 KN	Kgf	KN	Kgf	
RK 40	40		min	max	max				max	15.2	1,549	18.1	1,850	3.6	370	0.63
RK 40-2	40-2	12.70	7.85	7.92	3.98	8.15	9.6	14.4	1.5	30.4	3,098	36.3	3,700	6.2	630	1.19
RK 40-3	40-3									45.6	4,648	54.4	5,550	9.0	920	1.78
RK 40-4	40-4									60.8	6,197	72.5	7,400	12.0	1,220	2.37

運動能力表〔潤滑形式〕Ⅰ 手差し又は滴下給油 Ⅱ 油浴潤滑又は回転板による潤滑 Ⅲ 強制ポンプ潤滑


単位 (kw)

潤滑形式 小スプロケット	小スプロケット回転数 (rpm)														
	50	200	400	900	1200	1800	2400	3000	3500	4000	5000	6000	7000	8000	
	Ⅰ					Ⅱ			Ⅲ						
11	0.21	0.72	1.34	2.77	3.59	3.48	2.26	1.60	1.28	1.05	0.75	0.57	0.46	0.37	
12	0.23	0.79	1.47	3.05	3.95	3.96	2.57	1.84	1.46	1.19	0.85	0.65	0.51	0.43	
13	0.25	0.86	1.60	3.32	4.30	4.47	2.90	2.08	1.65	1.35	0.96	0.73	0.58	0.48	
14	0.27	0.93	1.73	3.60	4.66	5.00	3.25	2.32	1.84	1.51	1.08	0.82	0.65	0.53	
15	0.29	1.00	1.87	3.88	5.02	5.54	3.60	2.57	2.04	1.67	1.19	0.91	0.72	0.59	
16	0.31	1.07	2.00	4.16	5.39	6.10	3.96	2.84	2.25	1.84	1.32	1.00	0.80	0.65	
17	0.33	1.15	2.14	4.44	5.75	6.69	4.34	3.11	2.47	2.02	1.45	1.10	0.87	0.72	
18	0.35	1.22	2.28	4.72	6.12	7.28	4.73	3.39	2.69	2.21	1.57	1.19	0.95	0	
19	0.37	1.29	2.41	5.00	6.48	7.83	5.13	3.67	2.92	2.39	1.71	1.30	1.03	0	
20	0.39	1.37	2.55	5.29	6.85	8.28	5.54	3.96	3.15	2.57	1.84	1.40	1.11	0	
21	0.41	1.44	2.69	5.58	7.22	9.24	5.96	4.27	3.39	2.77	1.98	1.51	1.19	0	
22	0.43	1.51	2.83	5.86	7.60	9.86	6.39	4.57	3.63	2.97	2.13	1.62	1.28	0	
23	0.46	1.59	2.96	6.15	7.97	10.5	6.83	4.89	3.88	3.18	2.28	1.73	1.37	0	
24	0.48	1.66	3.10	6.44	8.34	11.2	7.28	5.22	4.13	3.39	2.42	1.84	1.46	0	
25	0.50	1.74	3.24	6.73	8.72	11.9	7.76	5.54	4.39	3.60	2.57	1.96	0		
28	0.56	1.96	3.67	7.61	9.86	14.2	9.18	6.57	5.22	4.27	3.05	2.32	0		
30	0.61	2.12	3.95	8.20	10.6	15.3	10.1	7.28	5.78	4.73	3.39	2.57	0		
32	0.65	2.27	4.24	8.79	11.4	16.4	11.2	8.06	6.37	5.22	3.73	0			
35	0.72	2.50	4.67	9.68	12.5	18.1	12.8	9.18	7.28	5.96	4.27	0			
40	0.83	2.89	5.39	11.2	14.5	20.9	15.7	11.2	8.88	7.28	5.22	0			
潤滑形式	Ⅰ		Ⅱ			Ⅲ									


●上の値は単列チェーンのものですから多列チェーンの場合には、多列係数をかけて下さい。(選定を参照して下さい。)

40スプロケット

(単位: mm)

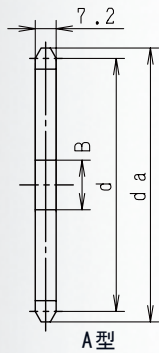


A型



新B型

B型ボス径※印に溝があります。
溝の外径は

9T : 24
10T : 28
11T : 32
12T : 36

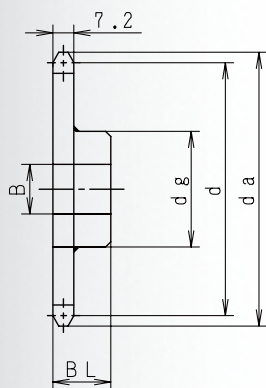

新BW型

歯数	外径 da	ピッチ径 d	歯底円 直径 (底径)	新 B 型					A 型		2列新B型				
				軸孔径B		ボス		概略 質量 kg	軸孔径B 下孔	概略 質量 kg	軸孔径B		ボス		概略 質量 kg
				下孔	最大	径dg	長さB.L				下孔	最大	径dg	長さB.L	
9	42	37.13	29.19	9	15	28※	22	0.11	9	0.04					
10	46	41.10	33.16	9	16	32※	22	0.14	9	0.05	13	14	28	35	0.18
11	50	45.08	37.14	10	20	36※	22	0.19	10	0.06	13	15	30	35	0.23
12	55	49.07	41.13	10	22	40※	22	0.22	10	0.10	14	18	35	35	0.34
13	59	53.07	45.13	13	20	37	22	0.23	13	0.10	14	20	37	35	0.39
14	63	57.07	49.13	13	24	42	22	0.28	13	0.11	14	24	42	35	0.47
15	67	61.08	53.14	13	28	46	22	0.34	13	0.15	14	28	46	35	0.56
16	71	65.10	57.16	13	30	50	22	0.40	13	0.17	14	30	50	35	0.65
17	75	69.12	61.18	13	32	54	22	0.46	13	0.20	14	32	54	35	0.75
18	79	73.14	65.20	13	35	57	22	0.51	13	0.20	14	35	57	35	0.85
19	83	77.16	69.22	13	39	62	22	0.59	13	0.20	14	39	62	35	0.98
20	87	81.18	73.24	14	45	67	25	0.76	14	0.26	14	45	67	40	1.3
21	91	85.21	77.27	14	45	71	25	0.85	14	0.30	14	47	71	40	1.4
22	95	89.24	81.30	14	50	75	25	0.95	14	0.30	14	50	75	40	1.6
23	99	93.27	85.33	14	50	77	25	1.0	14	0.35	14	50	77	40	1.7
24	103	97.30	89.36	14	42	63	25	0.81	14	0.37	14	55	83	40	1.9
25	108	101.33	93.39	14	42	63	25	0.88	14	0.40	18	59	87	40	2.1
26	112	105.36	97.42	14	42	63	25	0.92	14	0.45	18	62	91	40	2.3
27	116	109.40	101.46	14	42	63	25	0.96	14	0.50	18	62	91	40	2.3
28	120	113.43	105.49	14	42	63	25	1.0	14	0.51	18	62	91	40	2.3
29	124	117.46	109.52	14	42	63	25	1.1	14	0.51	18	62	91	49	2.4
30	128	121.50	113.56	14	42	63	25	1.1	14	0.60	18	73	106	40	3.0
31	132	125.53	117.59	14	45	63	25	1.2	14	0.61	18	73	106	40	3.0
32	136	129.57	121.63	14	45	68	28	1.3	14	0.68	18	73	100	50	3.2
33	140	133.61	125.67	14	45	68	28	1.3	14	0.70		73	100	50	
34	145	137.64	129.70	14	45	68	28	1.3	14	0.75		73	100	50	
35	149	141.68	133.74	14	45	68	28	1.4	14	0.83	17	55	100	50	3.8
36	153	145.72	137.78	17	45	68	28	1.4	17	0.90	17	55	100	50	
37	157	149.75	141.81	17	45	68	28	1.5	17	0.93					
38	161	153.79	145.85	17	45	68	28	1.5	17	0.95	17	55	100	50	
39	165	157.83	149.89	17	45	68	28	1.6	17	1.05					
40	169	161.87	153.93	17	45	68	28	1.6	17	1.06	17	55	100	50	4.8
41	173	165.91	157.97	17	45	73	32	1.7	17	1.15					
42	177	169.95	162.01	17	48	73	32	2.0	17	1.20	17	55	97	50	
43	181	173.98	166.04	17	48	73	32	2.1	17	1.23					
44	185	178.02	170.08	17	48	73	32	2.2	17	1.30					
45	189	182.06	174.12	17	48	73	32	2.2	17	1.36	17	63	97	50	5.5
46	193	186.10	178.16	17	48	73	32	2.3	17	1.40	17	63	97	50	
47	197	190.14	182.20	17	48	73	32	2.3	17	1.50					
48	201	194.18	186.24	17	48	73	32	2.3	17	1.53	17	63	97	50	
49	205	198.22	190.28	17	48	73	32	2.3	17	1.65					
50	209	202.26	194.32	17	48	73	32	2.4	17	1.70	17	63	97	50	
51	214	206.30	198.36	17	48	73	32	2.5	17	1.71					
52	218	210.34	202.40	17	48	73	32	2.6	17	1.80	17	63	97	50	
53	222	214.38	206.44	17	48	73	32	2.7	17	1.90					
54	226	218.42	210.48	17	48	73	32	2.8	17	2.00	17	63	97	50	7.2
55	230	222.46	214.52	17	48	73	32	2.9	17	2.15					
56	234	226.50	218.56	17	48	73	32	3.0	17	2.17					
57	238	230.54	222.60	17	48	73	32	3.0	17	2.25					
58	242	234.58	226.64	17	48	73	32	3.1	17	2.30					
59	246	238.62	230.68	17	48	73	32	3.2	17	2.40					
60	250	242.66	234.72	17	48	73	32	3.2	17	2.50	17	63	107	50	9.2
62	258	250.74	242.80	17	48	73	32	3.5	17	2.70					
64	266	258.83	250.89	17	48	73	32	3.7	17	2.80					
65	270	262.87	254.93	17	55	83	32	3.9	17	2.87					
66	274	266.91	258.97	17	55	83	32		17	2.95					
68	282	274.99	267.05	17	55	83	32		17	3.15					
70	290	283.07	275.13	19	55	83	32	4.3	19	3.30					
72	299	291.16	283.22	19	55	83	32		19	3.40					
74	307	299.24	291.30	19	55	83	32		19						
75	311	303.28	295.34	19	55	83	32	4.8	19	4.50					
76	315	307.32	299.38	19	55	83	32	5.00	19						
78	323	315.40	307.46	19	55	83	32	5.10	19						
80	331	323.49	315.55	19	60	87	35	5.90	19	5.50					
85	351	343.69	335.75	19	60	87	35	6.50	19						
90	371	363.90	355.96	19	60	87	35	7.15	19	6.00					

○上表の着色部分は歯先硬化を施しています。