



RK60

単列

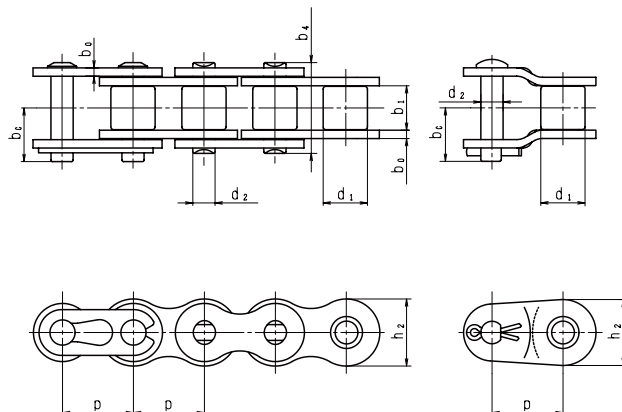

多列

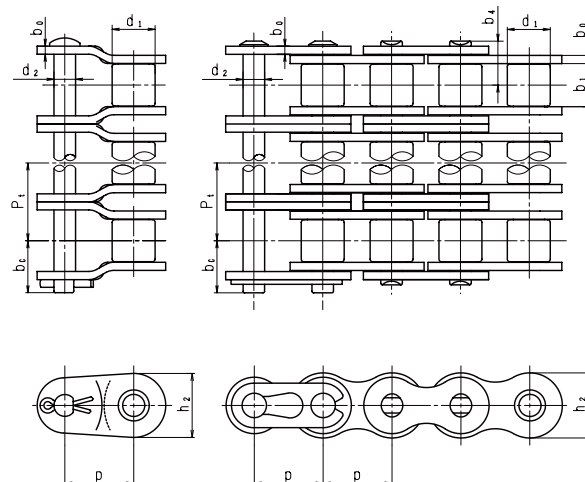

寸法票

単位 (mm)

チェーン 番 号	ピッチ (P)	内リンク 内 幅 (b ₁)	ローラ 外 径 (d ₁)	ピン			横 ピッチ (P _t)	プレート		引張強さ				RK最大許容張力		概略 質量 Kg/m
				外径 (d ₂)	長さ (b ₄ /2)	(b ₅)		厚さ (b ₀)	高さ (h ₂)	JIS 最小 KN	Kgf	RK 平均 KN	Kgf	KN	Kgf	
RK 60	60		min	max	max				max	34.2	3,486	44.6	4,550	8.8	900	1.48
RK 60-2	60-2	19.05	12.57	11.91	5.96	12.7	14.1	22.8	2.40	68.4	6,972	89.2	9,100	15.0	1,530	3.11
RK 60-3	60-3									102.6	10,460	133.9	13,650	22.0	2,250	4.63
RK 60-4	60-4									136.8	13,940	178.5	18,200	29.1	2,970	6.20

伝動能力表〔潤滑形式〕Ⅰ手差し又は滴下給油 Ⅱ油浴潤滑又は回転板による潤滑 Ⅲ強制ポンプ潤滑

単位 (kw)

潤滑形式 小スプロケット	小スプロケット回転数 (rpm)														
	50	100	200	500	700	900	1200	1400	1600	1800	2000	2500	3000	3500	4000
	Ⅰ					Ⅱ					Ⅲ				
11	0.75	1.40	2.61	5.96	8.07	10.1	8.88	7.02	5.74	4.81	4.11	2.94	2.24	1.78	1.45
12	0.82	1.54	2.87	6.55	8.86	11.1	10.1	7.98	6.54	5.48	4.69	3.35	2.55	2.02	1.66
13	0.90	1.68	3.13	7.14	9.66	12.1	11.3	9.03	7.38	6.19	5.28	3.78	2.87	2.28	1.87
14	0.97	1.82	3.39	7.73	10.5	13.1	12.7	10.1	8.28	6.91	5.90	4.22	3.22	2.55	2.09
15	1.05	1.96	3.65	8.33	11.3	14.1	14.0	11.2	9.18	7.68	6.54	4.69	3.56	2.83	2.31
16	1.12	2.10	3.92	8.93	12.1	15.2	15.6	12.3	10.1	8.43	7.21	5.16	3.92	3.11	2.55
17	1.20	2.24	4.18	9.54	12.9	16.2	17.1	13.5	11.0	9.25	7.91	5.65	4.30	3.41	2.79
18	1.28	2.38	4.45	10.1	13.7	17.2	18.6	14.7	12.0	10.1	8.58	6.16	4.69	3.72	3.04
19	1.35	2.53	4.71	10.8	14.6	18.3	20.2	16.0	13.1	10.9	9.33	6.68	5.08	4.03	3.30
20	1.43	2.67	4.98	11.4	15.4	19.3	21.8	17.2	14.1	11.8	10.1	7.21	5.48	4.35	0
21	1.51	2.82	5.25	12.0	16.2	20.3	23.5	18.5	15.1	12.7	10.8	7.76	5.90	4.69	0
22	1.59	2.96	5.52	12.6	17.1	21.4	25.2	19.8	16.3	13.6	11.6	8.28	6.33	5.02	0
23	1.66	3.11	5.80	13.2	17.9	22.4	26.9	21.2	17.4	14.5	12.5	8.88	6.77	5.36	0
24	1.74	3.25	6.07	13.8	18.7	23.5	28.5	22.6	18.5	15.5	13.3	9.48	7.21	5.72	0
25	1.82	3.40	6.34	14.5	19.6	24.6	30.3	24.0	19.7	16.5	14.1	10.1	7.68	6.08	0
28	2.06	3.84	7.17	16.3	22.1	27.7	35.9	28.5	23.4	19.5	16.7	11.9	9.10	0	
30	2.22	4.14	7.72	17.6	23.8	29.9	38.7	31.6	25.9	21.7	18.5	13.3	10.1	0	
32	2.38	4.44	8.28	18.9	25.6	32.1	41.5	34.8	28.5	23.0	20.4	14.6	11.1	0	
35	2.62	4.89	9.12	20.8	28.2	35.3	45.7	39.8	32.6	27.3	23.4	16.7	12.7	0	
40	3.03	5.65	10.5	24.0	32.3	40.8	52.8	49.0	39.9	33.4	28.5	20.4	0		
潤滑形式	Ⅰ			Ⅱ			Ⅲ								



●上の値は単列チェーンものですから多列チェーンの場合には、多列係数をかけて下さい。(選定を参照して下さい。)

60スプロケット


(単位：mm)

歯 数	外径 da	ピッチ径 d	歯底円 直径 (底径)	新 B 型					A 型		2列新B型						
				軸孔径B		ボ ス		概略 質量 kg	軸孔径B	概略 質量 kg	軸孔径B		ボ ス		概略 質量 kg		
				下孔	最大	径dg	長さB.L				下孔	最大	径dg	長さB.L			
9	63	55.70	43.79	10	24	42※	32	0.40	10	0.17							
10	70	61.65	49.74	14	30	49※	32	0.49	10	0.20	16	22	39	50			
11	76	67.62	55.71	14	32	51※	32	0.60	14	0.26	16	24	44	50			
12	82	73.60	61.69	14	32	51	32	0.69	14	0.30	16	32	51	50		1.1	
13	88	79.60	67.69	14	35	57	32	0.81	14	0.37	18	35	57	50		1.3	
14	94	85.61	73.70	16	39	62	32	0.96	16	0.43	18	39	62	56		1.7	
15	101	91.62	79.71	16	45	68	32	1.1	16	0.51	18	45	68	56		2.0	
16	107	97.65	85.74	16	47	73	32	1.3	16	0.60	18	50	76	56		2.4	
17	113	103.67	91.76	16	47	73	32	1.4	16	0.68	18	55	82	56		2.8	
18	119	109.71	97.80	16	55	83	40	2.0	16	0.75	18	59	87	56		3.1	
19	125	115.74	103.83	16	55	83	40	2.1	16	0.88	18	63	95	56		3.6	
20	131	121.78	109.87	16	55	83	40	2.2	16	0.96	20	69	101	56		4.1	
21	137	127.82	115.91	16	55	83	40	2.3	16	1.10	20	75	107	56		4.5	
22	143	133.86	121.95	16	55	83	40	2.4	16	1.15	20	78	113	56		5.0	
23	149	139.90	127.99	16	55	83	40	2.5	16	1.20	20	80	119	56		5.3	
24	155	145.95	134.04	16	55	83	40	2.5	16	1.40	20	80	120	56		5.4	
25	162	151.99	140.08	16	55	83	40	2.7	16	1.51	20	80	120	56		6.0	
26	168	158.04	146.13	16	55	83	40	2.9	16	1.65	20	80	120	56		5.3	
27	174	164.09	152.18	16	55	83	40	3.0	16	1.70	20	80	120	56			
28	180	170.14	158.23	16	55	83	40	3.1	16	1.90	20	80	120	56			
29	186	176.20	164.29	16	55	83	40	3.3	16	2.05	20	80	120	56			
30	193	182.25	170.34	20	55	83	40	3.4	20	2.25	20	85	130	56		8.4	
31	199	188.30	176.39	20	55	83	40	3.5	20	2.40							
32	205	194.35	182.44	20	55	83	40	3.7	20	2.55	20	85	130	56			
33	211	200.41	188.50	20	55	83	40	3.8	20	2.70							
34	217	206.46	194.55	20	55	83	40	4.0	20	2.90	20	85	130	56			
35	223	212.52	200.61	20	55	83	40	4.2	20	3.12	20	85	130	56		11.0	
36	229	218.57	206.66	20	55	83	40	4.4	20	3.21	20	75	117	56			
37	236	224.63	212.72	20	55	83	40	4.6	20	3.45							
38	241	230.69	218.78	20	55	83	40	4.8	20	3.56	20	75	117	56			
39	248	236.74	224.83	20	55	83	40	4.9	20	3.83							
40	253	242.80	230.89	20	55	83	40	5.1	20	4.05	20	75	117	56		13.0	
41	260	248.86	236.95	20	63	93	45	5.5	20	4.22							
42	266	254.92	243.01	20	63	93	45	6.0	20	4.37	20	75	117	71			
43	272	260.98	249.07	20	63	93	45	6.2	20	4.61							
44	278	267.03	255.12	20	63	93	45	6.4	20	4.89							
45	284	273.09	261.18	20	63	93	45	6.7	20	5.10	20	75	117	71		18.0	
46	290	279.15	267.24	20	63	93	45	6.8	20	5.25							
47	296	285.21	273.30	20	63	93	45	7.1	20	5.50							
48	302	291.27	279.36	20	63	93	45	7.4	20	5.75	20	75	117	71			
49	308	297.33	285.42	20	63	93	45	7.6	20	6.00							
50	314	303.39	291.48	20	63	93	45	7.8	20	6.25	20	75	117	71			
51	321	309.45	297.54	20	63	93	45	8.0	20	6.50							
52	327	315.51	303.60	20	63	93	45	8.4	20	6.84	20	75	117	71			
53	333	321.57	309.66	20	63	93	45	8.6	20								
54	338	327.63	315.72	20	63	93	45	8.8	20	7.25	20	75	117	71		24.2	
55	345	333.69	321.78	20	63	93	45	9.2	20	7.65							
56	351	339.75	327.84	20	63	93	45	9.5	20								
57	357	345.81	333.90	20	63	93	45		20	8.10							
58	363	351.87	339.96	20	63	93	45		20	8.73							
59	369	357.93	346.02	20	63	93	45		20								
60	375	363.99	352.08	20	63	93	45	10.6	20	9.00	20	85	127	71		29.8	
62	387	376.12	364.21						20								
64	399	388.24	376.33			93	45		20								
65	405	394.30	382.39	20	75	107	45	12.8	20	10.60							
66	411	400.36	388.45	20	75	107	45		20								
68	423	412.49	400.58	20	75	107	45		20								
70	436	424.61	412.70	20	75	107	45	14.4	20	12.20							
72	448	436.73	424.82	20	75	107	45		20	12.50							
74	460	448.86	436.95	20	75	107	45		20								
75	466	454.92	443.01	20	75	107	45	16.30	20	13.00							
76	472	460.98	449.07						20	14.00							
80	496	485.23	473.32	30					30	15.90							
85	527	515.54	503.63	30					30								
90	557	545.85	533.94	30					30	18.30							

○上表の着色部分は歯先硬化を施しています。



B型ボス径※印に溝があります。
溝の外径は
9T : 34
10T : 40
11T : 46

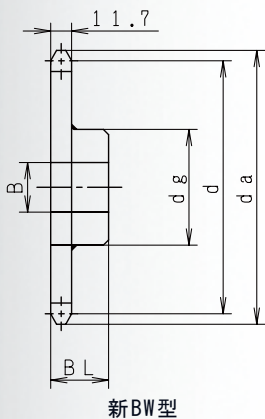

新BW型