


多列

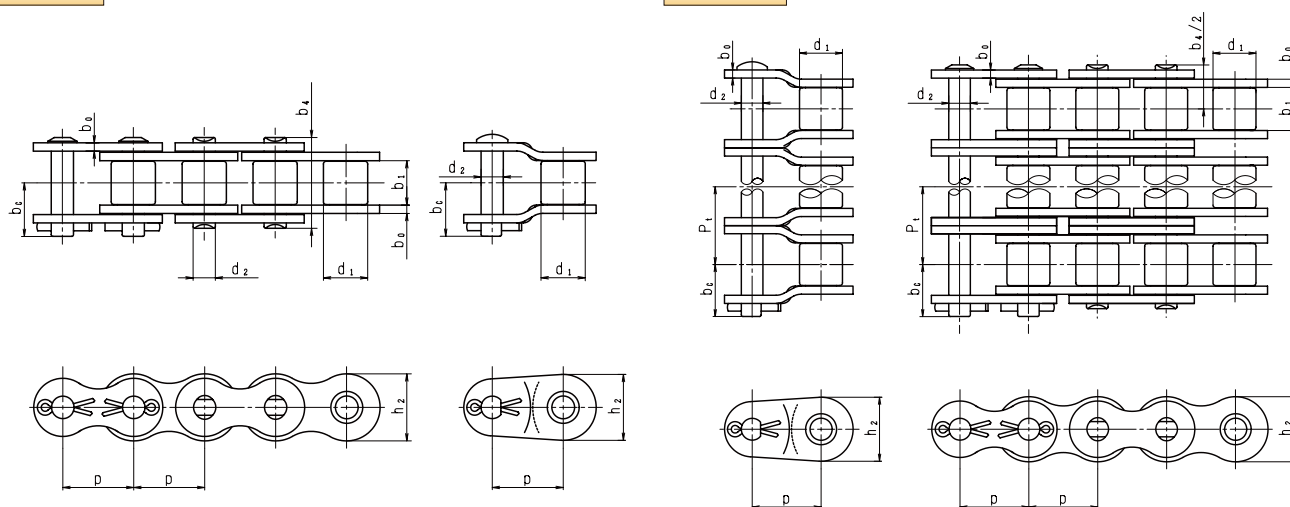

寸法票

チェーン 番 号		ピッチ	内リンク 内 幅	ローラ 外 径	ピン			横 ピッチ	プレート		引張強さ				RK最大許容張力		概略 質量	
RK	JIS				(P)	(b ₁)	(d ₁)		外径 (d ₂)	長さ (b ₄ /2)	(b _c)	(Pt)	厚さ (b ₀)	高さ (h ₂)	JIS 最小 KN	Kgf		RK 平均 KN
RK 80	80	25.40	min	max	max						max	61.2	6,238	70.6	7,200	14.7	1,500	2.55
RK 80-2	80-2		15.75	15.88	7.94	16.2	19.4	29.3	3.20	24.2	122.4	12,477	141.2	14,400	25.0	2,550	5.07	
RK 80-3	80-3										183.6	18,710	211.9	21,600	36.7	3,750	7.58	
RK 80-4	80-4										244.8	24,950	282.5	28,800	48.5	4,950	10.10	

伝動能力表〔潤滑形式〕Ⅰ手差し又は滴下給油 Ⅱ油浴潤滑又は回転板による潤滑 Ⅲ強制ポンプ潤滑

单位 (kw)

潤滑形式 小スプロケット	小スプロケット回転数 (rpm)																		
	25	50	100	200	300	400	500	700	900	1000	1200	1400	1600	1800	2000	2200	2400	3000	
	Ⅰ							Ⅱ							Ⅲ				
11	0.90	1.68	3.14	5.86	8.44	10.9	13.4	18.1	17.2	14.6	11.1	8.80	7.23	6.06	5.17	4.48	3.93	2.81	
12	0.99	1.85	3.45	6.44	9.27	12.0	14.7	19.9	19.5	16.6	12.7	10.1	8.21	6.90	5.89	5.11	4.48	3.2	
13	1.08	2.02	3.76	7.02	10.1	13.1	16.0	21.7	22.2	18.8	14.3	11.3	9.33	7.76	6.65	5.76	5.06	3.62	
14	1.17	2.18	4.08	7.60	11.0	14.2	17.3	23.5	24.8	21.0	16.0	12.7	10.4	8.73	7.43	6.44	5.65	4.04	
15	1.26	2.35	4.39	8.19	11.8	15.3	18.7	25.3	27.5	23.3	17.8	14.1	11.5	9.62	8.21	7.14	6.27	4.48	
16	1.35	2.52	4.71	8.78	12.7	16.4	20.0	27.1	30.3	25.7	19.5	15.5	12.7	10.6	9.10	7.83	6.90	4.94	
17	1.44	2.69	5.03	9.38	13.5	17.5	21.4	29.0	33.0	28.1	21.4	16.9	13.9	11.6	9.92	8.58	7.54	5.41	
18	1.54	2.86	5.35	9.98	14.4	18.6	22.8	30.8	35.9	30.7	23.3	18.5	15.1	12.7	10.8	9.40	8.21	5.89	
19	1.63	3.04	5.67	10.6	15.2	19.7	24.1	32.7	39.0	33.2	25.3	20.1	16.4	13.7	11.7	10.1	8.95	6.39	
20	1.72	3.21	5.99	11.2	16.1	20.9	25.5	34.5	42.1	35.9	27.3	21.6	17.8	14.8	12.7	11.0	9.62	0	
21	1.81	3.38	6.31	11.8	17.0	22.0	26.9	36.4	45.3	38.6	29.4	23.3	19.1	16.0	13.7	11.9	10.4	0	
22	1.91	3.56	6.64	12.4	17.8	23.1	28.3	38.3	48.0	41.4	31.5	25.0	20.4	17.2	14.6	12.7	11.1	0	
23	2.00	3.73	6.97	13.0	18.7	24.3	29.7	40.1	50.3	44.2	33.6	26.7	21.9	18.4	15.7	13.6	11.9	0	
24	2.09	3.91	7.29	13.6	19.6	25.4	31.0	42.0	52.7	47.5	35.9	28.5	23.3	19.5	16.6	14.5	12.7	0	
25	2.19	4.08	7.62	14.2	20.5	26.5	32.4	43.9	55.1	50.5	38.1	30.3	24.8	20.7	17.8	15.4	13.5	0	
28	2.47	4.62	8.62	16.1	23.2	30.0	36.7	49.6	62.2	59.8	45.2	35.9	29.4	24.6	21.0	18.2	16.0		
30	2.67	4.97	9.28	17.3	24.9	32.3	39.5	53.5	67.1	66.3	50.1	39.8	32.5	27.3	23.3	20.2	17.8		
32	2.86	5.33	9.95	18.6	26.7	34.7	42.4	57.3	71.9	72.7	55.2	43.8	35.9	30.1	25.7	22.2	19.5		
35	3.15	5.87	11.0	20.5	29.5	38.2	46.7	63.2	79.2	83.2	63.2	50.1	41.0	34.4	29.4	25.4	0		
40	3.64	6.79	12.7	23.6	34.0	44.1	53.9	73.0	91.5	101	76.8	61.3	50.1	42.0	35.9	14.9	0		
潤滑形式	Ⅰ			Ⅱ				Ⅲ											



●上の値は単列チェーンものですから多列チェーンの場合には、多列係数をかけて下さい。（選定を参照して下さい。）

80スプロケット


(単位：mm)

歯 数	外径 da	ピッチ径 d	歯底円 直径 (底径)	新 B 型				A 型		2列新B型					
				軸孔径B		ボ ス		概略 質量 kg	軸孔径B 下孔	概略 質量 kg	軸孔径B		ボ ス		概略 質量 kg
				下孔	最大	径dg	長さB.L				下孔	最大	径dg	長さB.L	
9	85	74.27	58.39	14	35	58※	40	0.87	11	0.4					
10	93	82.19	66.31	17	32	52	40	0.97	17	0.58	23	35	58	63	1.5
11	101	90.16	74.28	17	38	60	40	1.2	17	0.62	23	39	60	63	1.8
12	110	98.14	82.26	17	45	67	40	1.5	17	0.82	23	45.5	67	63	2.5
13	118	106.14	90.26	17	48	77	40	1.9	17	0.87	23	50	77	63	3.1
14	126	114.15	98.27	17	50	77	40	2.0	17	1.02	23	58	86	63	3.7
15	134	122.17	106.29	20	63	93	40	2.6	20	1.20	23	64	94	63	4.3
16	142	130.20	114.32	20	63	93	40	2.8	20	1.35	23	70	102	71	5.5
17	151	138.23	122.35	20	63	93	40	3.0	20	1.54	23	76	110	71	6.4
18	159	146.27	130.39	20	63	93	40	3.2	20	1.75	23	66	110	71	6.0
19	167	154.32	138.44	20	63	93	40	3.4	20	1.95	23	66	110	71	6.4
20	175	162.37	146.49	20	63	93	40	3.6	20	2.15	23	75	107	71	7.6
21	183	170.42	154.54	20	63	93	40	3.8	20	2.41	23	75	107	71	7.8
22	192	178.48	162.60	20	75	107	45	4.8	20	2.63	25	80	117	71	8.8
23	200	186.54	170.66	20	75	107	45	5.1	20	2.90	25	80	117	71	9.3
24	208	194.60	178.72	20	75	107	45	5.4	20	3.20	25	80	117	80	10.5
25	216	202.66	186.78	20	75	107	45	5.6	20	3.45	25	80	117	80	11.1
26	224	210.72	194.84	20	75	107	45	5.9	20	3.70	25	80	117	80	11.7
27	233	218.79	202.91	20	75	107	45	6.1	20	3.96	25	80	117	80	
28	241	226.86	210.98	20	75	107	45	6.5	20	4.26	25	80	117	80	
29	249	234.93	219.05	20	75	107	45	6.9	20	4.65	25	80	117	80	
30	257	243.00	227.12	20	75	107	45	7.1	20	5.00	25	80	117	80	17.5
31	265	251.07	235.19	20	75	107	45	7.4	20	5.30					
32	273	259.14	243.26	20	75	107	45	7.8	20	5.60	25	80	117	80	
33	281	267.21	251.33	20	75	107	45	8.1	20	6.00					
34	289	275.29	259.41	20	75	107	45	8.5	20	6.40	25	80	117	80	
35	297	283.36	267.48	20	75	107	45	8.9	20	6.85	25	80	117	80	23.5
36	306	291.43	275.55	20	80	117	50	10.1	20	7.20	25				
37	314	299.51	283.63	20	80	117	50	10.5	20	7.40					
38	322	307.58	291.70	20	80	117	50	10.9	20	8.00	25				
39	330	315.66	299.78	20	80	117	50	11.5	20	8.47					
40	338	323.74	307.86	20	80	117	50	11.8	20	9.00	25	89	127	90	30.5
41	346	331.81	315.93	20	80	117	50	12.3	20	9.42					
42	354	339.89	324.01	20	80	117	50	12.7	20	9.75	25	89	127	90	
43	362	347.97	332.09	20	80	117	50	13.2	20	10.34					
44	370	356.04	340.16	20	80	117	50	13.7	20	10.65					
45	378	364.12	348.24	20	80	117	50	14.2	20	11.25	25	89	127	90	38.0
46	387	372.00	356.32	20	80	117	50	14.7	20	11.80					
47	395	380.28	364.40	20	80	117	50	15.2	20	12.20					
48	403	388.36	372.48	20	80	117	50	15.8	20	13.00	25	89	127	90	
49	411	396.44	380.56	20	80	117	50	16.3	20	14.00					
50	419	404.52	388.64	20	80	117	50	16.8	20	14.80	25	89	127	90	
52	435	420.68	404.80	20	80	117	50	17.8	20	16.00	25	89	127	90	
54	451	436.84	420.96	20	80	117	50	19.2	20	17.00	25	89	127	90	53.3
55	459	444.92	429.04	20	80	117	50	20.3	20	18.50					
56	468	453.00	437.12	20	80	117	50	20.8	20	19.00					
58	484	469.16	453.28	20	80	117	50	21.9	20	20.30					
60	500	485.33	469.45	30	80	117	50	23.1	30	21.00	30	89	127	90	65.0
65	540	525.73	509.85	30	89	127	63	28.5	30	25.00					
70	581	566.15	550.27	30	89	127	63	32.1	30	28.30					
75	621	606.56	590.68	30	89	127	63	36.2	30	32.00					
80	662	646.97	631.01	30	89	127	63	42.9	30	38.00					

○上表の着色部分は歯先硬化を施しています。



B型ボス径※印に溝があります。
溝の外径は
9T：46

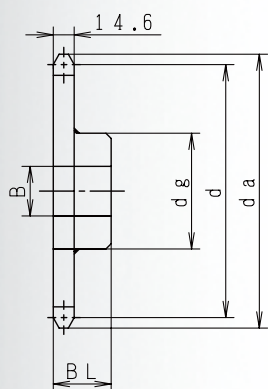

新BW型