





単列

OL

多列

OL

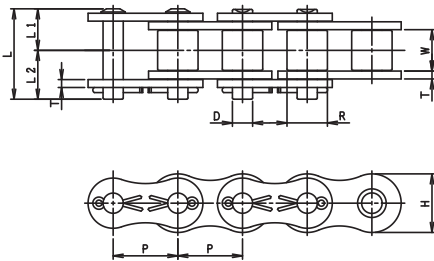

寸法表

単位 (mm)

チェーン番号	ピッチ P	内リンク内幅 W (最小)	ブッシュ外径 R (最大)	外径 D (最大)	ピン長さ		横ピッチ C	プレート		引張強さ				最大許容張力		概略質量 kg/m
					L1 (最大)	L2 (最大)		厚さ T	高さ H (最大)	JIS 最小 kN	最小 kgf	平均 kN	平均 kgf	kN	kgf	
RK 180										281.0	28654	353.0	36000	57.9	5900	13.39
RK 180-2										562.0	57308	706.1	72000	98.4	10030	26.62
RK 180-3	57.15	35.48	35.71	17.46	36.95	46.05	65.8	7.1	54.3	843.0	85962	1059.1	108000	144.6	14750	39.85
RK 180-4										-	-	1412.1	144000	190.9	19470	53.08
RK 180-5										-	-	1765.2	180000	225.6	23000	66.31

伝動能力表〔潤滑形式〕 I 手差し又は滴下給油 II 油浴潤滑又は回転板による潤滑 III 強制ポンプ潤滑

単位 (kW)

潤滑形式 小 sprocket 歯数	小 sprocket 回転数 (rpm)																								
	10	25	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150
	I		II										III												
11	3.47	7.92	14.8	27.6	39.7	51.4	62.9	74.1	85.1	96.0	92.7	79.2	68.6	60.2	53.4	47.8	43.1	39.1	35.7	32.8	30.2	28.0	26.0	24.3	
12	3.81	8.70	16.2	30.3	43.6	56.5	69.1	81.4	93.5	105	106	90.2	78.2	68.6	60.9	54.5	49.1	44.6	40.7	37.4	34.4	31.9	29.6	27.6	
13	4.16	9.48	17.7	33.0	47.6	61.6	75.3	88.7	102	115	119	102	88.2	77.4	68.6	61.4	55.4	50.3	45.9	42.1	38.8	36.0	33.4	31.2	
14	4.50	10.3	19.2	35.8	51.5	66.7	81.6	96.1	110	125	133	114	98.5	86.5	76.7	68.6	61.9	56.2	51.3	47.1	43.4	40.2	37.4	34.8	
15	4.85	11.1	20.7	38.5	55.5	71.9	87.9	104	119	134	148	126	109	95.9	85.0	76.1	68.6	62.3	56.9	52.2	48.1	44.6	41.4	38.6	
16	5.20	11.9	22.1	41.3	59.5	77.1	94.2	111	128	144	160	139	120	106	93.7	83.8	75.6	68.6	62.7	57.5	53.0	49.1	45.6	42.6	
17	5.55	12.7	23.6	44.1	63.5	82.3	101	119	136	154	171	152	132	116	103	91.8	82.8	75.2	68.6	63.0	58.1	53.8	50.0	46.6	
18	5.91	13.5	25.1	46.9	67.6	87.6	107	126	145	163	182	166	144	126	112	100	90.2	81.9	74.8	68.6	63.3	58.6	54.5	50.8	
19	6.22	14.3	26.7	47.9	71.6	92.8	113	134	154	173	193	180	156	137	121	108	97.8	88.8	81.1	74.4	68.6	63.5	59.1	55.1	
20	6.62	15.1	28.2	52.6	75.7	98.1	120	141	162	183	204	194	168	148	131	117	106	95.9	87.6	80.4	74.1	68.6	63.8	59.5	
21	6.98	15.9	29.7	55.4	79.8	103	126	149	171	193	215	209	181	159	141	126	114	103	94.2	86.5	79.7	73.8	68.6	64.0	
22	7.34	16.7	31.2	58.3	83.9	109	133	157	180	203	226	224	194	170	151	135	122	110	101	92.7	85.5	79.2	73.6	68.6	
23	7.70	17.6	32.8	61.1	88.1	114	139	164	189	213	237	239	207	182	161	144	130	118	108	99.1	91.4	84.6	78.7	73.3	
24	8.06	18.4	34.3	64.0	92.2	119	146	172	198	223	248	255	221	194	172	154	139	126	115	106	97.4	90.2	83.8	78.2	
25	8.42	19.2	35.9	66.9	96.4	125	153	180	207	233	259	271	235	206	183	164	148	134	122	112	104	95.9	89.1	83.1	
28	9.52	21.7	40.5	75.6	109	141	172	203	233	263	293	321	279	245	217	194	175	159	145	133	123	114	106	98.5	
30	10.3	23.4	43.7	81.5	117	152	185	219	252	284	315	347	309	271	241	215	194	176	161	148	136	126	117	109	
32	11.0	25.1	46.8	87.3	126	163	199	235	270	304	338	372	340	299	265	237	214	194	177	163	150	139	129	120	
35	12.1	27.6	51.6	96.2	139	180	219	259	297	335	372	410	389	342	303	271	245	222	203	186	172	159	148	138	
40	14.1	31.9	59.6	111	160	207	254	299	343	387	430	473	476	418	370	331	299	271	248	227	210	194	180	168	
45	15.9	36.2	67.6	126	182	236	288	339	390	439	489	537	568	498	442	395	357	324	296	271	250	232	215	201	
50	17.8	40.6	75.8	141	204	264	323	380	437	492	548	602	656	584	518	463	418	379	346	318	293	271	252	235	
55	19.7	45.0	84.0	157	226	293	358	421	484	546	607	667	727	673	597	534	482	437	399	366	338	313	291	271	
60	21.7	49.5	92.3	172	248	321	393	463	532	600	667	733	799	767	680	609	549	498	455	418	385	357	331	309	
潤滑形式	I		II										III												

●上の値は単列チェーンのもので多列チェーンの場合には、多列係数をかけて下さい。(選定を参照して下さい。)

●破線より右の範囲で使用される場合は当社へお問い合わせ下さい。